




SMD3030 80LEDS/M

Specialized
LED strip
Manufacturer

ADW-SN3030-80-24V Sauna Led Strip


Dimension structure

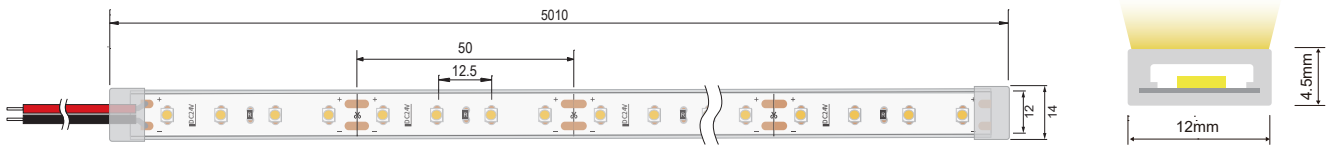

- DC24V, 4.8 W/9.6 W optional;
- LUMILEDS 3030 LED, with excellent heat dissipation performance, and longer service life;
- IP67 Integrated extrusion silicone tube;
- Ambient temperature is -25~100°C, suitable for the bathroom and sauna room;
- For 4.8W version, it's 5 years warranty for ambient temperature $\leq 85^{\circ}\text{C}$; 3 years warranty for ambient temperature $\leq 100^{\circ}\text{C}$;
- For 9.6W version, it's 3 years warranty for ambient temperature $\leq 85^{\circ}\text{C}$; 2 years warranty for ambient temperature $\leq 100^{\circ}\text{C}$;


Basic Parameters

Model No	ADW-SN3030-80-24V
Input Voltage	24VDC
LED Type	3030
LED QTY/M	80
CRI	≥ 80
IP Gard	IP67
Max.run length	5M

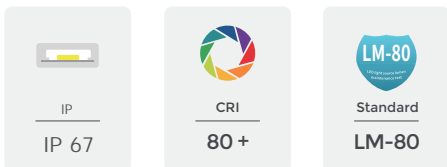


CCT(K)	CRI	Voltage(V)	Power (W/M)	Lumen (LM/M)	Efficiency (LM/W)	Unit length (mm)	Max.run length (M)
2700K ± 100	≥ 80	DC24V	4.8	782.4	163	50	5
3000K ± 150	≥ 80	DC24V	4.8	830.4	173	50	5
3500K ± 200	≥ 80	DC24V	4.8	840	175	50	5
4000K ⁺³⁰⁰ ₋₂₀₀	≥ 80	DC24V	4.8	854.4	178	50	5
5000K ⁺⁴⁰⁰ ₋₂₀₀	≥ 80	DC24V	4.8	854.4	178	50	5
6500K ⁺¹⁰⁰ ₋₅₀₀	≥ 80	DC24V	4.8	854.4	178	50	5
2700K ± 100	≥ 80	DC24V	9.6	1564.8	163	50	5
3000K ± 150	≥ 80	DC24V	9.6	1660.8	173	50	5
3500K ± 200	≥ 80	DC24V	9.6	1680	175	50	5
4000K ⁺³⁰⁰ ₋₂₀₀	≥ 80	DC24V	9.6	1708.8	178	50	5
5000K ⁺⁴⁰⁰ ₋₂₀₀	≥ 80	DC24V	9.6	1708.8	178	50	5
6500K ⁺¹⁰⁰ ₋₅₀₀	≥ 80	DC24V	9.6	1708.8	178	50	5


Connection Diagram

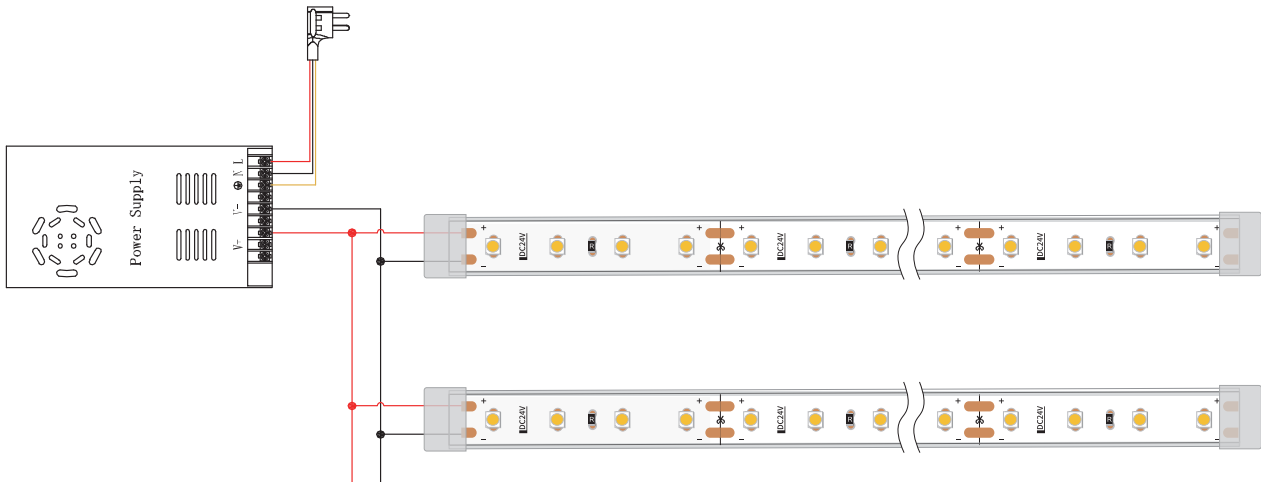


 Cautions

When install the led strip,please note the installation technique.The led strip can be bent,but not distorted,as shown below.

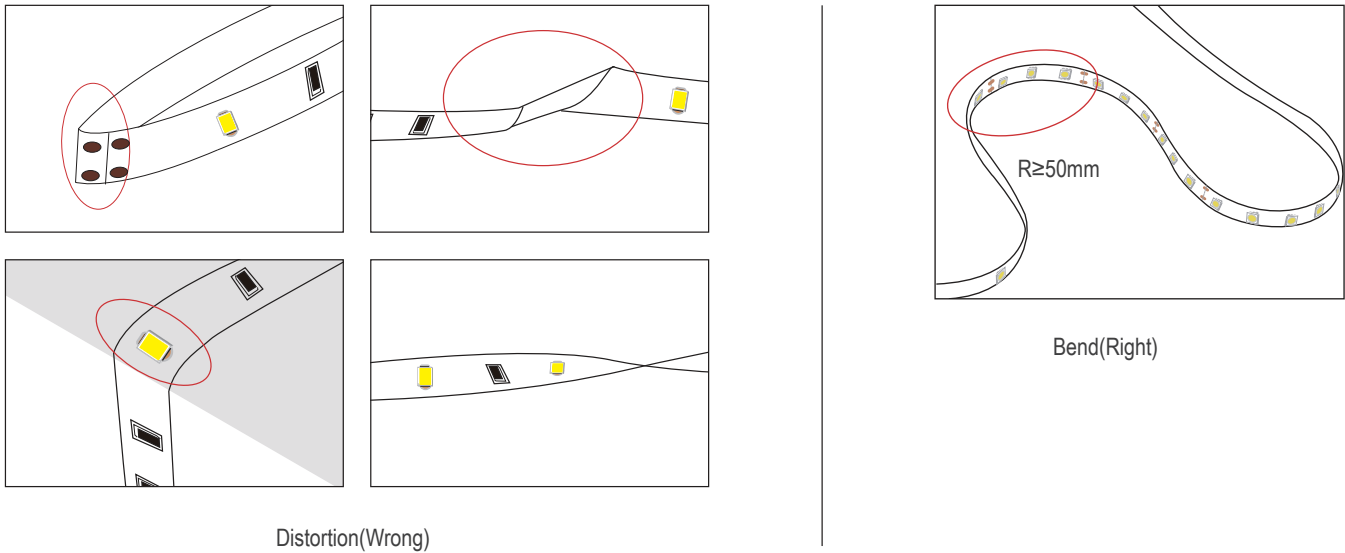

 LED strips are low voltage products,you must use the power supply(transformer).Please don,t connect the led strip directly to the AC 110v or AC 220v,otherwise it will burn out the LED strips.

 Clean up the installation surface,it will ensure the reliability of the adhesive.The electrical connection process must be operated by a professional person.

Package

